


09/718,679

AMENDMENTS TO THE DRAWINGS

In response to the specification objection, Applicant submits the attached replacement sheets of the drawing corrections, which amend Figure 2 to more clearly show that “[w]henver an acknowledgement packet is received (2.2), the source checks for a timeout condition (2.3). If a timeout is detected the system reverts to SS/CA phase. If however, no timeout is detected the system calculates the lookahead-loss (2.4) and then checks for a packet loss (2.5).” These corrections are consistent with the specification on Page 12, lines 7-16.

Applicant also submits another drawing correction, which amends Figure 3 to more clearly show the system transitions from the (O) state to the (K) state and the (K) state to the (O) state. Further, the proposed drawing correction more clearly shows the loss window, “lwnd,” not the congestion window “cnwd” consistent with the specification on Page 13, line 10- Page 14, line 10.

Attachments: Replacement sheets (2)

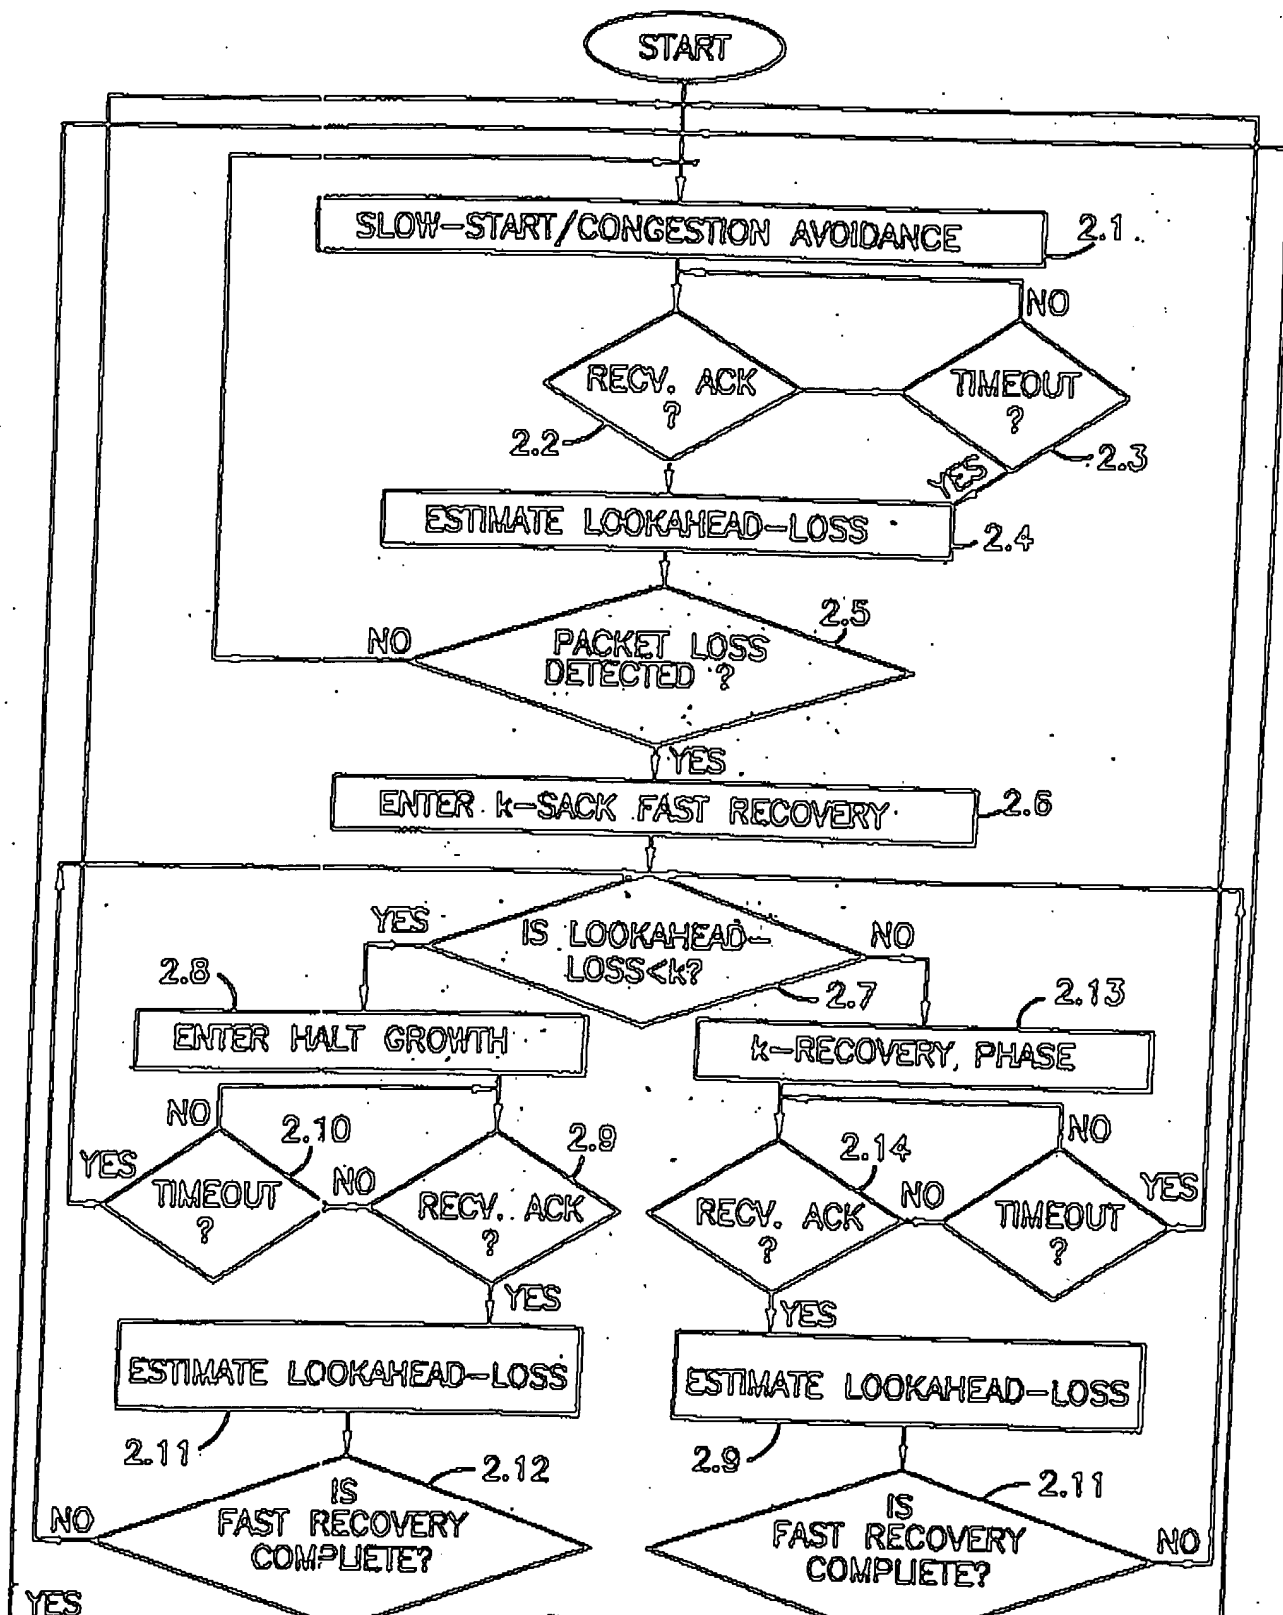

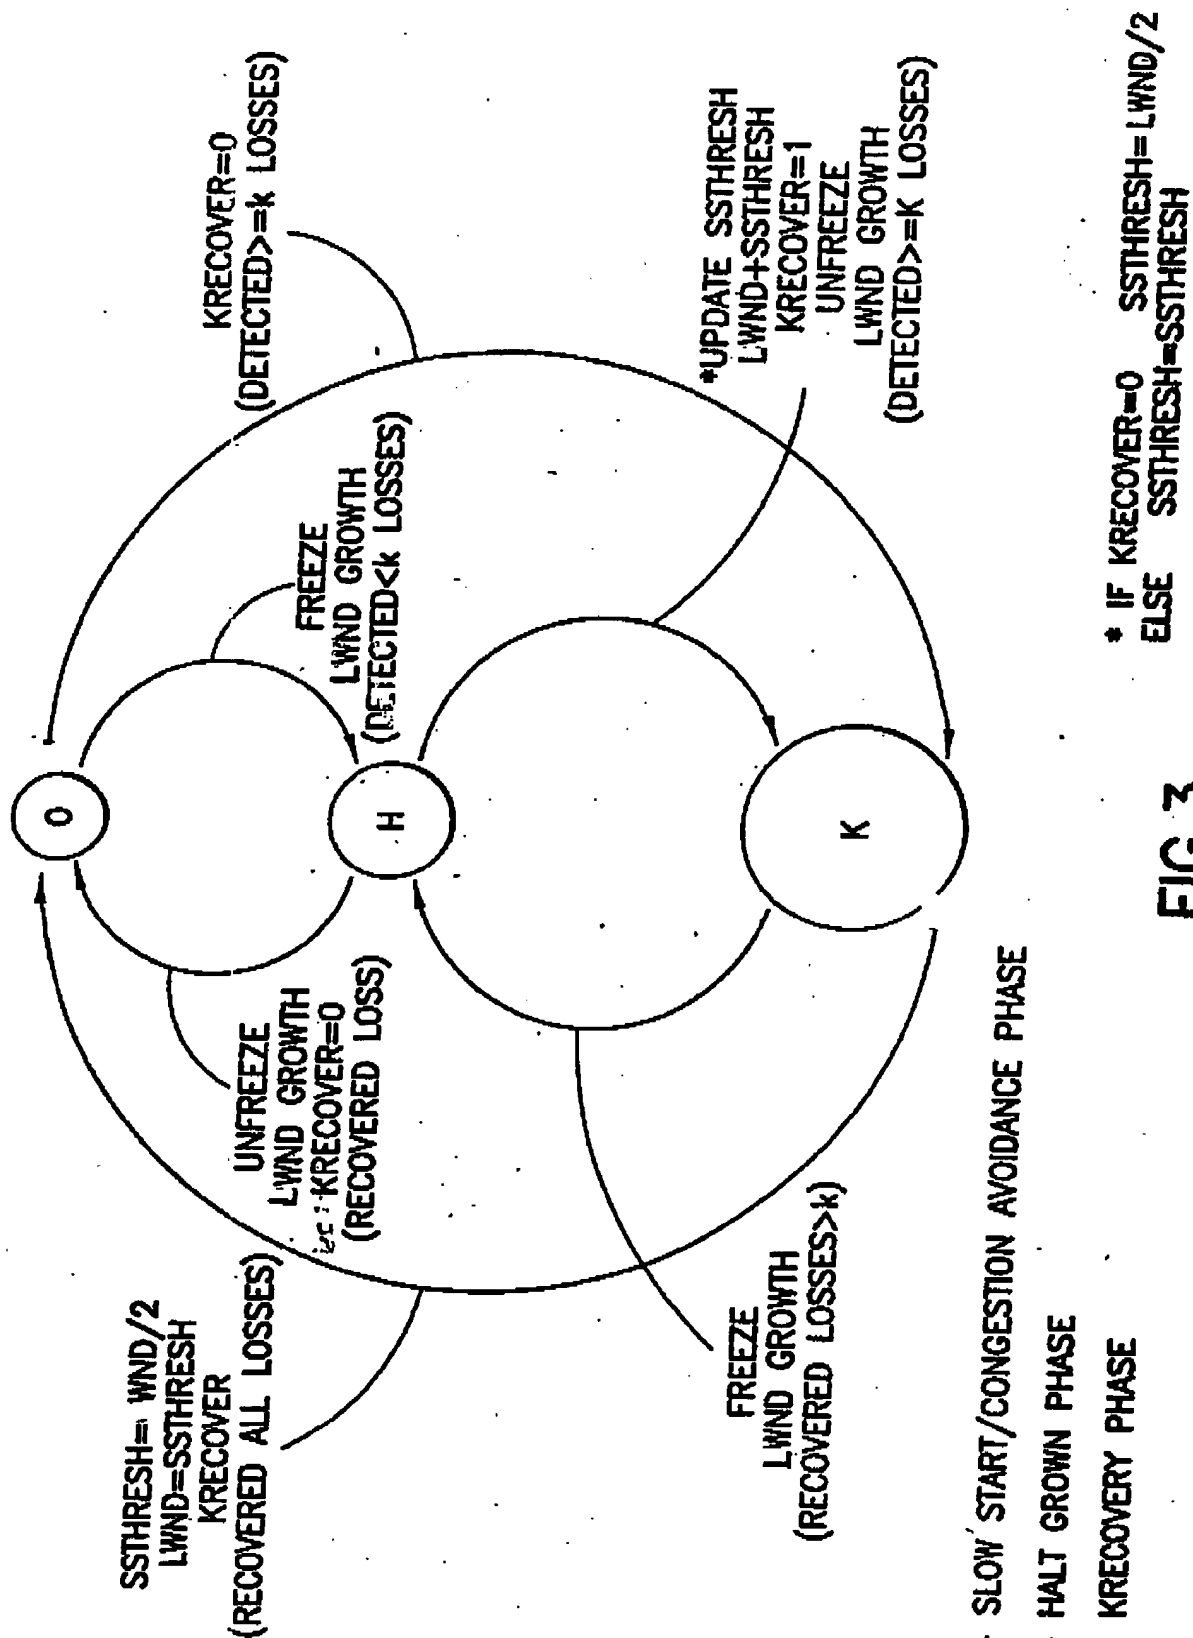


FIG.3

- SLOW START/CONGESTION AVOIDANCE PHASE
- HALT GROWN PHASE
- KRECOVERY PHASE